

1 UPS 25-40 N 180



: [96913060](#)

*
*
*

, PES/PP.

1-

: 2 .. 110 °C

: 60 °C

983.2 kg/m³

: 110

: CE,VDE,EAC,WEEE

DIN W.-Nr. 1.4301

, PES/PP

80

: 40 °C

: 10 bar

G 1 1/2

PN 10

: 180 mm

1: 25 W

2: 35 W

: 45 W

50 Hz

: 1 x 230 V

1: 0.12 A

2: 0.16 A

3: 0.2 A



: 1.5 µF

(IEC 34-5): IP44





(IEC 85): F

	:	2.9 kg
	:	3.1 kg
	:	0.004 m ³
VVS	:	380481041
RSK	:	5803098
	:	RS
	:	84137030

96913060 UPS 25-40 N 180 50 Hz

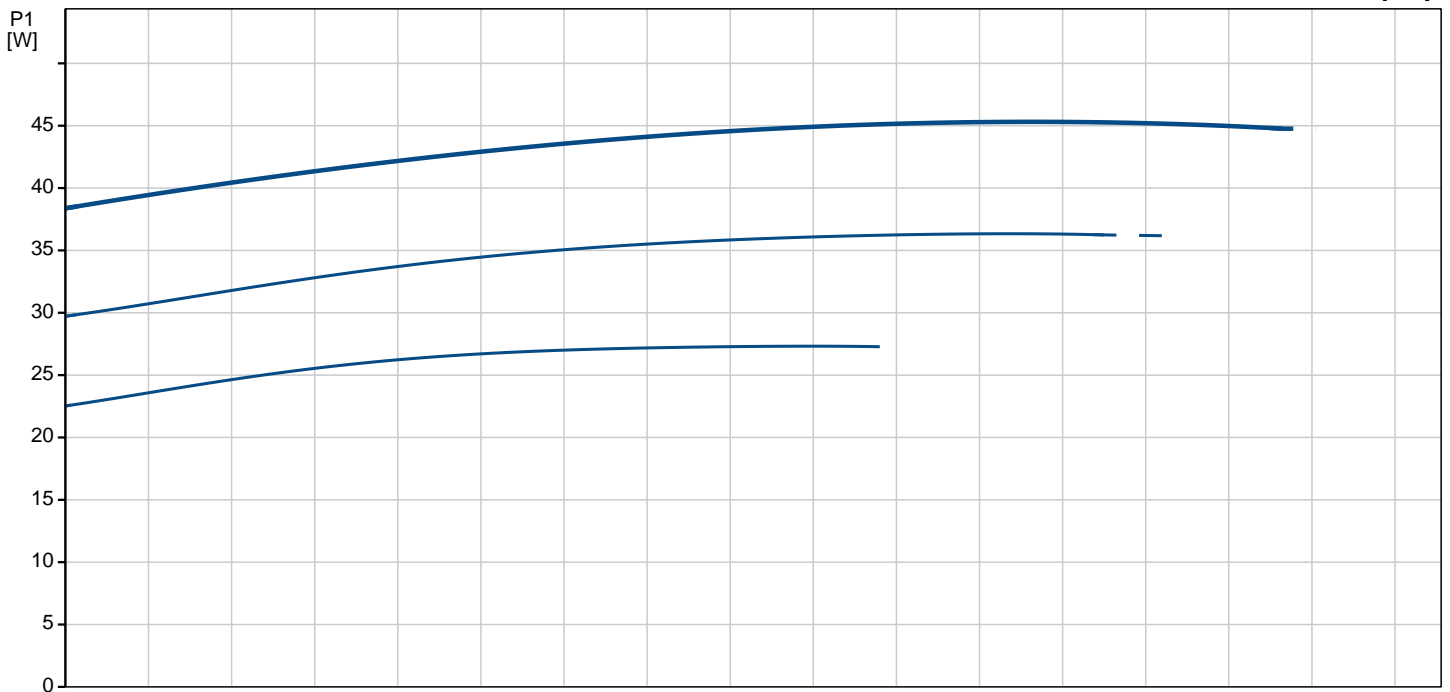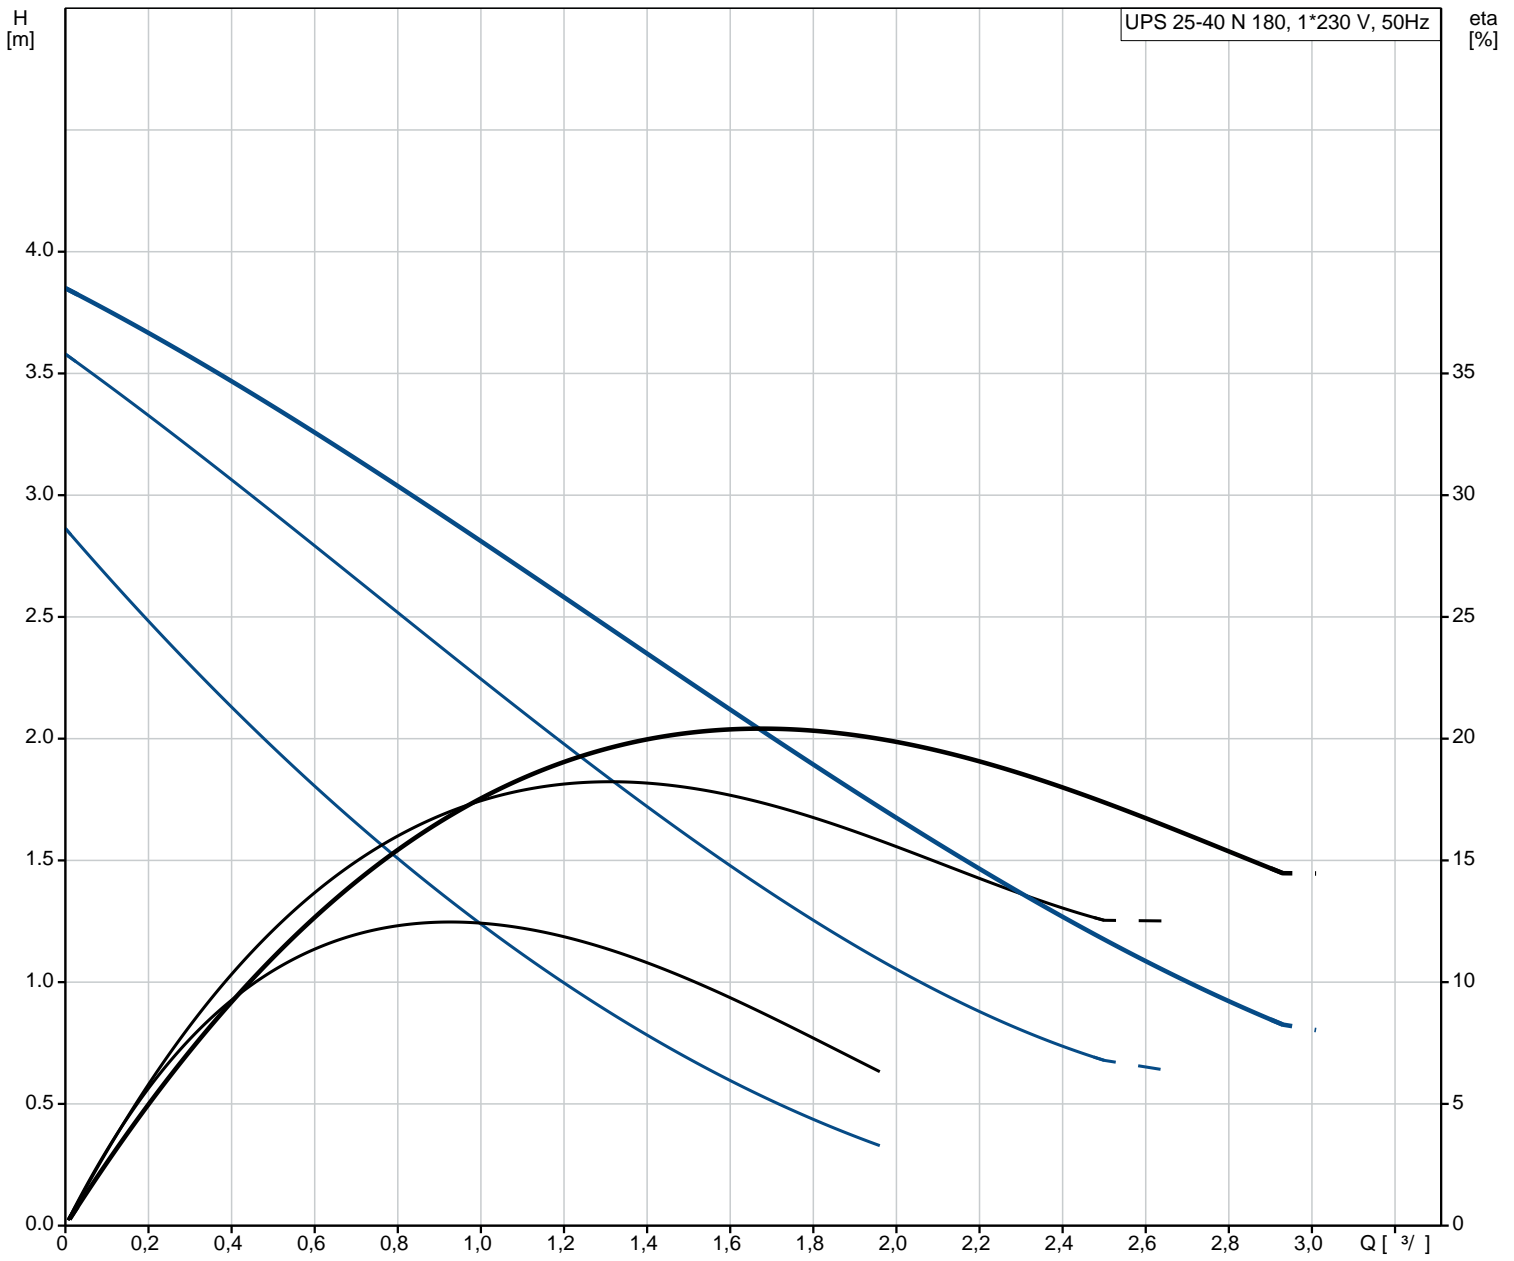

No.:	UPS 25-40 N 180
EAN	96913060
	5700313543083
No:	3
	40 dm
	110
	CE,VDE,EAC,WEEE
	DIN W.-Nr. 1.4301
	, PES/PP
80	40 °C
	10 bar
	G 1 1/2
	PN 10
	: 180 mm
	2 .. 110 °C
	60 °C
	983.2 kg/m ³
1:	25 W
2:	35 W
	45 W
	50 Hz
	1 x 230 V
1:	0.12 A
2:	0.16 A
3:	0.2 A
	1.5 µF
(IEC 34-5):	IP44
(IEC 85):	F
	9H
	2.9 kg
	3.1 kg
	0.004 m ³
VVS	380481041
RSK	5803098
	RS
	84137030

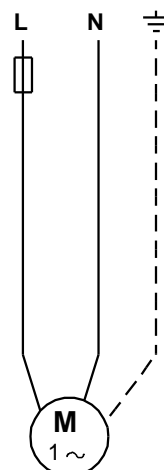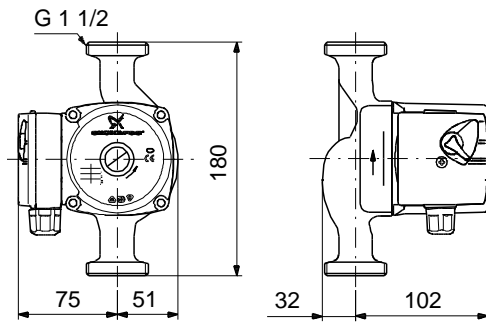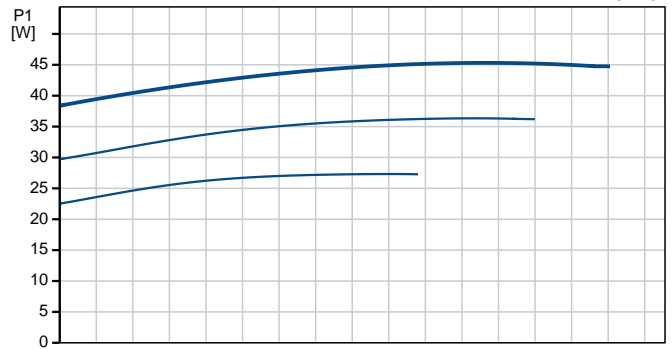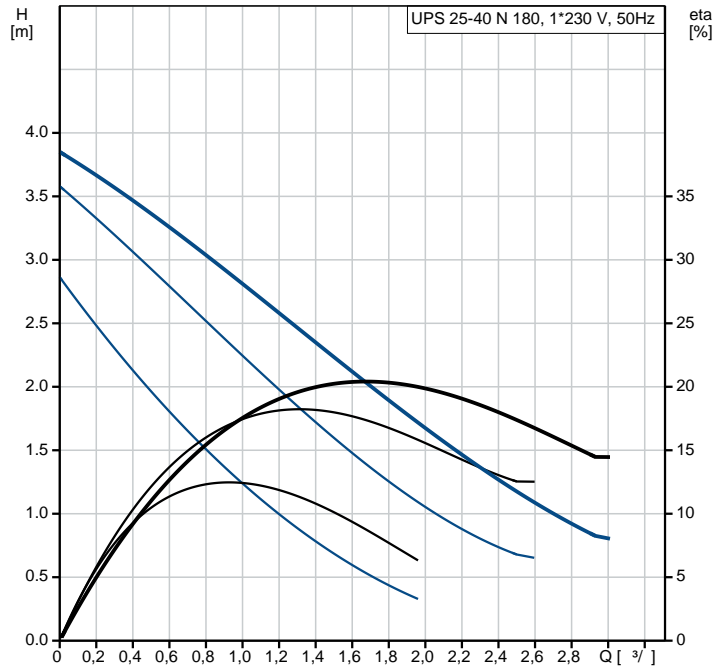

96913060 UPS 25-40 N 180 50 Hz

