


## GE SERIES BACKWASHING PREDISPOSITION

The filters of the GE Series could be manufactured with a predisposition for the cleaning of the SS cartridges. The filter will be made with the configuration on the right:

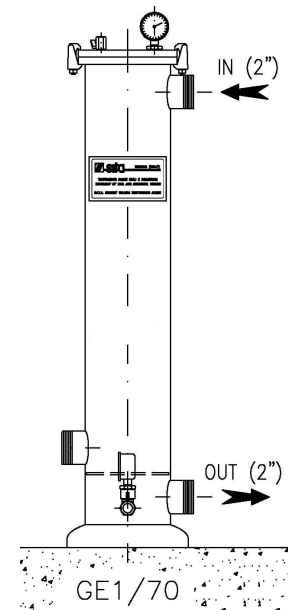

### Hydraulic Installation (not supplied):

In this picture the plant hydraulic scheme is represented.

In case of filter back washing follow this procedures:

Close valve C rotate valve A, and open valve B. In this way the water flow reverses going up from below and cleans the filter. The dirty water will flow from valve B to the drain.

