



## UV 480 LCD<sup>2</sup> Technical Data

<b>GENERAL INFORMATION</b>	
Max flow rate	85 l/m
UVC transmittance	99%- 1 cm
UVC dose	300 J/m <sup>2</sup>
Water Temperature range	5-50° C
Total consumption	88 W
Mounting	Vertical or horizontal
Quartz sleeve cleaning system	
Manual	Availabe – RM version (only SS 316L)


<b>UV REACTOR</b>	
Material	Stainless Steel 304 (optional 316L)
Connections	Thread 1 ½" M
Drain/Air Valve	1/8" ½" M thread
Total Volume	7.9 l
Total weight	6 kg
Max working pressure	10 bars g
Protection class	IP 54
Shape	Z
Flow direction	From bottom to top

<b>UV LAMP</b>	
Number	1
Lifespan	9000 hr
Lamp power	80 W
Type	HO low pressure type 028124

<b>UV SENSOR (ONLY on PLUS MODELS)</b>	
Type	UVC selective sensor Mod. UV737
Sensor Cable	Shielded cable 4 meters
Sensor holder material	Stainless steel 316L

<b>CONTROL PANEL</b>	<b>LCD (PLUS)</b>
Material and colour	Black Polypropylene
Dimensions	215 x 215 x 90 mm
Protection class	IP 55 (IP 65 on request)
Ambient temperature range	5 – 45 °C
Power supply	230 V - 50/60 Hz (115V – 50/60 Hz on request)
Lamp cable	1 m
Power supply cable	1 m
Monitor display	LCD SITA
Hour meter	Yes for total system life
Resettable hour meter	Yes for lamp life control
Lamp function control	Yes
Alarm led	Yes
Free contact (NO - NC)	Yes – general alarm (max 2 A)
230 V output (NO - NC)	Yes – general alarm (max 2 A)
Remote ON/OFF contact	Yes (settable)
ON/OFF Timer	Yes (settable)
Reactor temperature measurement and alarm	Yes (°C) – settable value (shut off for high temperature) on PLUS MODELS
UV Irradiance measurement and alarm	Yes (% or W/m <sup>2</sup> optional) – settable value on PLUS MODELS
4/20 mA output	Optional – for Irradiance and water temperature on PLUS MODELS
Audio alarm	Optional

Rev. 09-2014

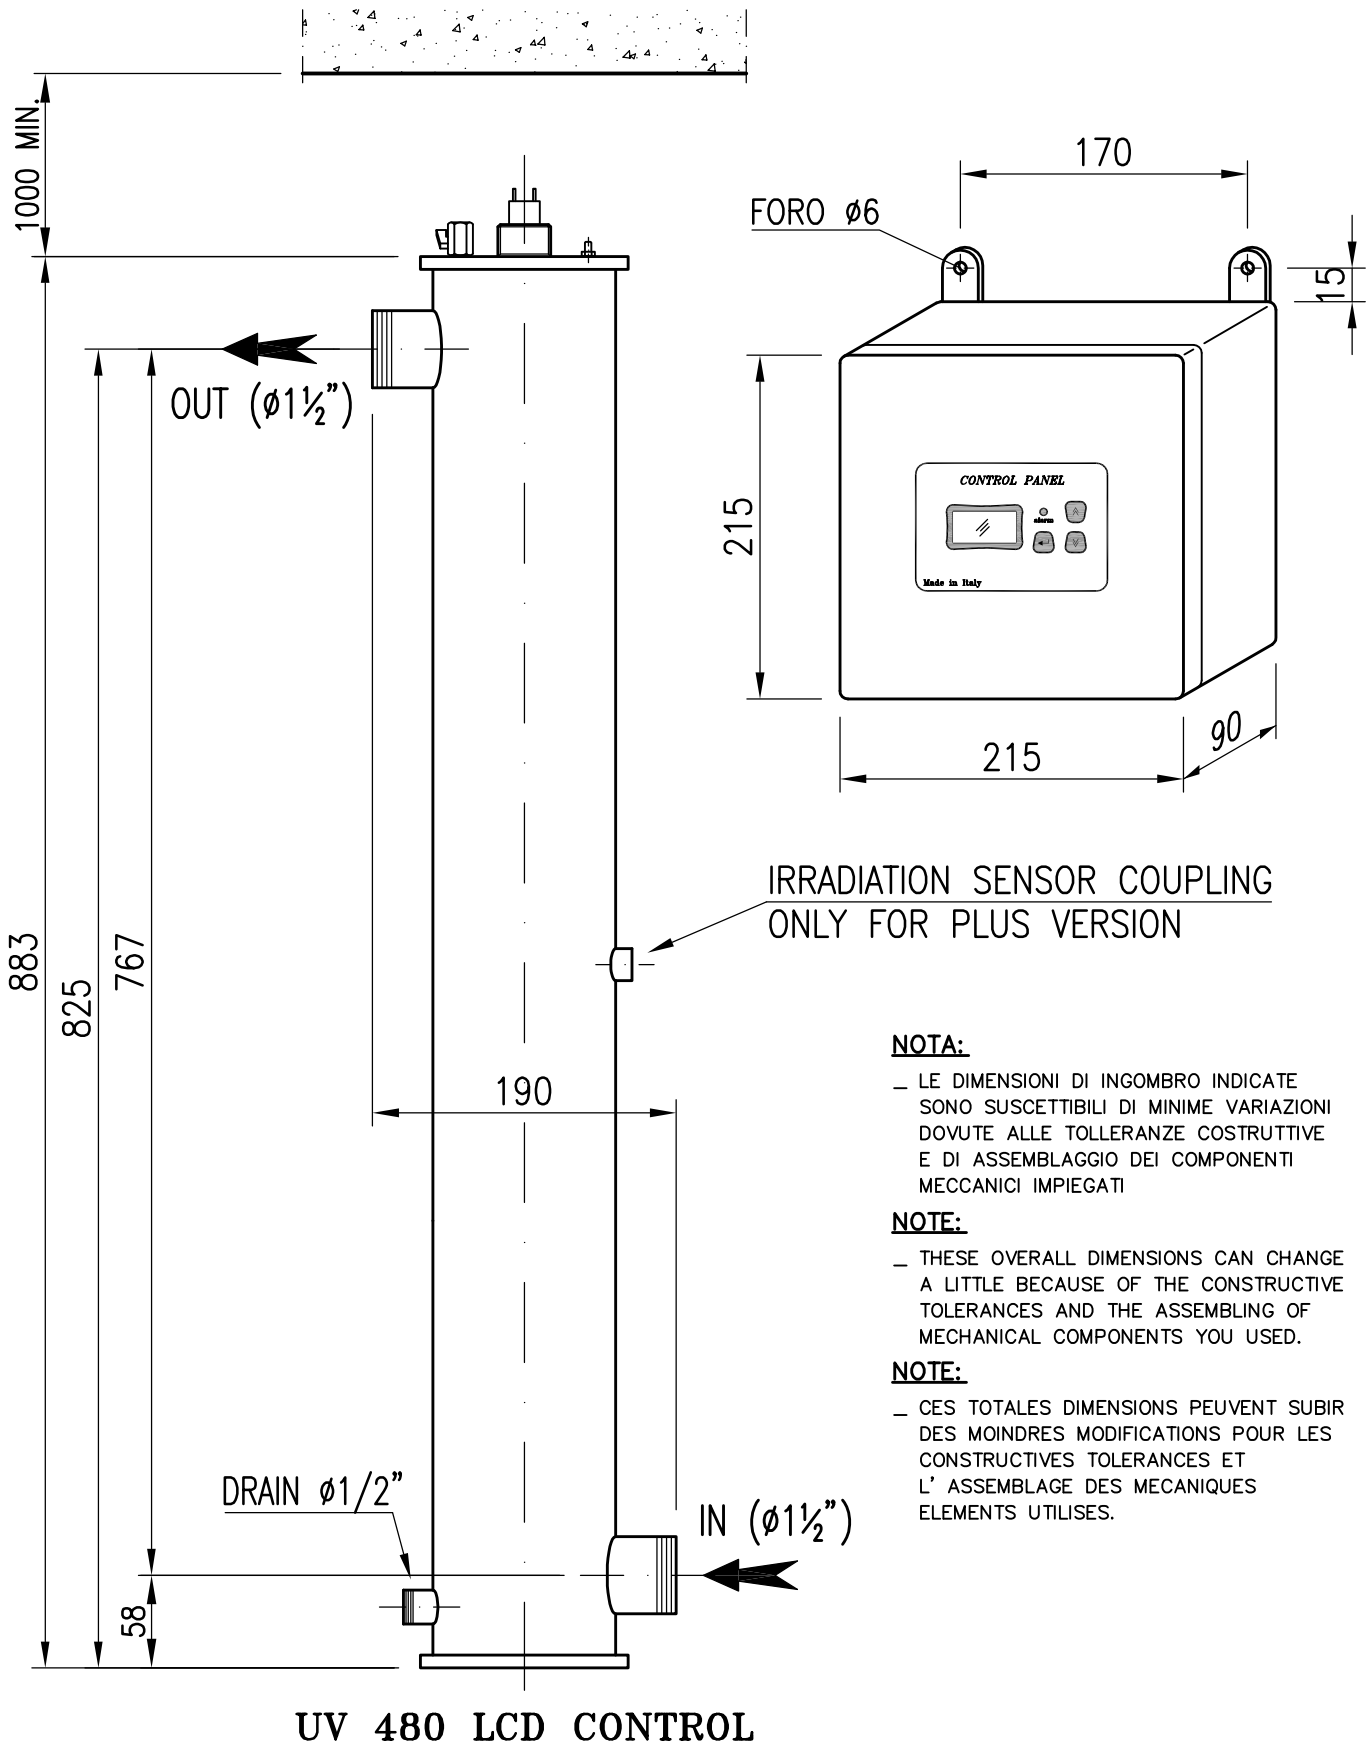

IRRADIATION SENSOR COUPLING  
ONLY FOR PLUS VERSION

- NOTA:**
- LE DIMENSIONI DI INGOMBRO INDICATE SONO SUSCETTIBILI DI MINIME VARIAZIONI DOVUTE ALLE TOLLERANZE COSTRUTTIVE E DI ASSEMBLAGGIO DEI COMPONENTI MECCANICI IMPIEGATI
- NOTE:**
- THESE OVERALL DIMENSIONS CAN CHANGE A LITTLE BECAUSE OF THE CONSTRUCTIVE TOLERANCES AND THE ASSEMBLING OF MECHANICAL COMPONENTS YOU USED.
- NOTE:**
- CES TOTALES DIMENSIONS PEUVENT SUBIR DES MOINDRES MODIFICATIONS POUR LES CONSTRUCTIVES TOLERANCES ET L' ASSEMBLAGE DES MECANQUES ELEMENTS UTILISES.

NOME FILE: UV480 LCD.DWG

<b>A</b>	PRIMA EMISSIONE	30/10/14	SCHENONE	MAZZONE
REVISIONE	DESCRIZIONE	DATA	DISEGNATO	APPROVATO
S.r.l. Società Italiana Trattamento Acque <small>Via Rivarolo, 61 - 16161 Genova Italy - Tel. 0039-10-7406848 / Fax 0039-10-7406851 email info@sitauv.com</small>		<b>DISINFEZIONE UV-C</b> <b>MODELLO 480 LCD</b> <b>LAY-OUT</b>		CODICE /
<small>LA SITA s.r.l. SI RISERVA A TERMINI DI LEGGE LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO COMUNQUE NOTO A TERZI O A DITTE CONCORRENTI SENZA LA SUA AUTORIZZAZIONE SCRITTA</small>		F.to <b>A4</b>	Scala /	Foglio <b>01</b> di <b>01</b>
CLIENTE		/		